

Voyager[®]

7" Heavy Duty LCD QuadView Monitor
VOM719WP



PRODUCT FEATURES:

- Engineered for heavy-duty, commercial use
- 7" digital wide format color TFT LCD panel
- Single image, split-screen, or QuadView viewing modes
- Four camera inputs and six triggers
- DC auto source for switching triggers (turn signal compatible)
- Waterproof housing (IPX6)
- Backlit control buttons
- Built-in audio speaker
- AMPS mounting provisions
- Manual/auto day/night display brightness control
- CE, FCC, e-Mark certified

CONTACT US

1-888-452-4053

1040 HIGHWAY 212
MICHIGAN CITY, IN 46360

SALES@MSFOSTER.COM
WWW.MSFOSTER.COM




MS FOSTER

SERVING THE TRANSPORTATION INDUSTRY

Voyager[®]

7" Heavy Duty LCD QuadView Monitor VOM719WP

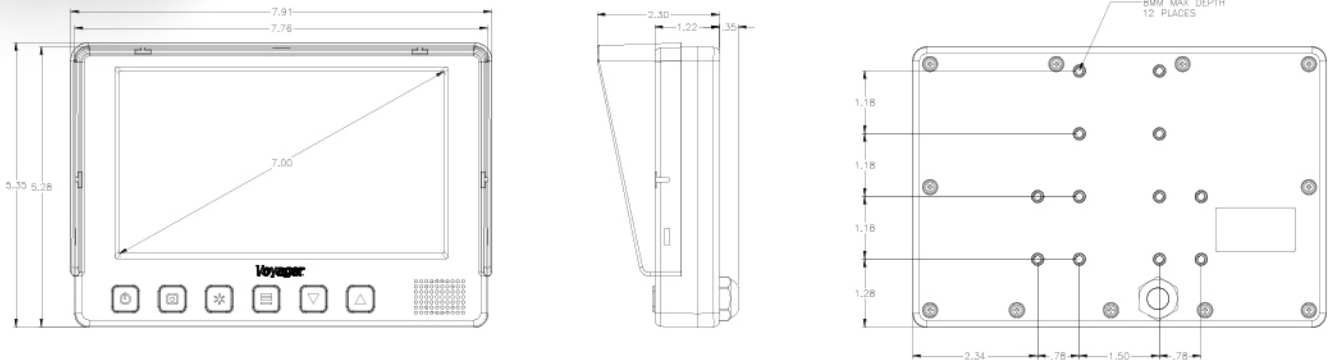

Specifications

Power System	12 / 24 VDC
Operating Voltage Range	10 ~ 24V
Power Consumption (MAX)	600 mA
Operating Temperature Range	-20°C to 70°C
Storage Temperature Range	-20°C to 70°C
ASA Validation Test Specification	ES0013
IP Waterproof Rating	IPX6
Operating Relative Humidity	100%
Overall Dimensions (inches)	1.2(D) x 5.3(H) x 7.8(W)
Product Weight (unpacked)	1 lbs. 8 oz.
Video Output Signal Format	NTSC/PAL
Video Signal Level	1.0V p-p ; 75Ω
Audio	0.2 watt
Resolution	800(H) x 480(V)
View Angles	60°(TOP), 70°(BOTTOM), 75°(LEFT, RIGHT)
Brightness	500 nit
Contrast Ratio	500:1
Response Time	5ms(R) 20ms(F)
Display Format	16:9

CONTACT US 1-888-452-4053

1040 HIGHWAY 212
MICHIGAN CITY, IN 46360

SALES@MSFOSTER.COM
WWW.MSFOSTER.COM



MS FOSTER

SERVING THE TRANSPORTATION INDUSTRY