

# ATTENUATOR

## PRODUCT GUIDE



**TrafFix  
Devices Inc.**






# Table of Contents

<b>Scorpion® Truck Mounted Attenuator</b>	<b>1</b>
<b>Scorpion® Trailer Attenuator</b>	<b>9</b>
<b>Big Sandy® Sand Barrels</b>	<b>13</b>
<b>TrafFix Water-Wall™</b>	<b>16</b>
<b>TrafFix Water-Wall™ Fence</b>	<b>18</b>
<b>TrafFix Sentry™ Water-Cable Barrier</b>	<b>19</b>
<b>SLED™ Crash Cushions</b>	<b>23</b>
<b>SLED™ Mini Crash Cushions</b>	<b>29</b>
<b>SLED™ Euro-Terminal</b>	<b>30</b>
<b>Compressor® Crash Cushions</b>	<b>34</b>





# Scorpion® Truck Mounted Attenuator (TMA)

The Scorpion TMA has been tested and PASSED ALL optional and mandatory requirements suggested in the NCHRP-350 Report for TL-3. Additionally, the Scorpion TMA has passed the UKTD49, 110 km/h (68 mph) test.



*The Scorpion TMA is hydraulically powered and measures 13 feet long when fully extended, making it ideal for stationary and mobile construction zones.*



*The Scorpion TMA is fully extended, with the changeable message panel in the travel or storage position.*

The Scorpion is a Truck Mounted Attenuator (TMA) that is truly “different by design”.


The Scorpion TMA consists of strut and cartridge sections that are linked together on a support frame. The curved side rails are made from corrosion resistant aluminum tubes, which offer full width impact protection along the entire length of the TMA. The side rails were designed to re-direct errant vehicles away from the rear of the truck (coffin corner). Other manufacturer's TMA models have little or no side-angle impact protection.



*The Scorpion TMA and message panel in the storage or transport position.*

The aluminum boxes are filled with a moisture resistant, aluminum honeycomb material. The boxes, together with the curved side rails, absorb the energy from an impacting vehicle. The aluminum boxes are painted with a bright yellow powder-coated finish, for lasting durability.

SCORPION® TRUCK MOUNTED ATTENUATOR



SCORPION® TRUCK MOUNTED ATTENUATOR



# SAVING LIVES AROUND THE WORLD





# Versatility and Flexibility—TrafFix Devices Offers THREE Different Scorpion TMA Models

SCORPION® TRUCK MOUNTED ATTENUATOR



## MODEL A

The Scorpion TMA Model A utilizes only the cartridge section providing impact protection up to 45 mph (70 km/h). It incorporates a modular design, which can be upgraded to a Model C-90 or Model C (to meet NCHRP-350, TL-3 requirements), by simply adding the strut section.



## SPECIFICATIONS

**MODEL A**  
(NCHRP-350, TL-2)  
Weight 760 lbs. (346 kgs.)  
Length (from back of vehicle)  
Travel/Storage 3' (1 m)  
Deployed 8' 8" (2.65 m)  
Width 8' (2.45 m)  
Height (from ground)  
Travel/Storage 11' (3.35 m)  
Deployed (ground clearance) 1' (.3 m)  
Tests Successfully Passed  
2-50, 2-51



## MODEL C-90

The Scorpion TMA Model C-90 folds just to the 90-degree position (when folding over the truck bed is not desired). This feature allows for easy transit in the upright position. The Scorpion TMA Model C-90 provides TL-3 impact protection.



**MODEL C-90**  
(NCHRP-350, TL-3)  
Weight 2,350 lbs. (1070 kgs.)  
Length (from back of vehicle)  
Travel/Storage 3' 10" (0.94 m)  
Deployed 13' 10" (4.21 m)  
Width 8' (2.45 m)  
Height (from ground)  
Travel/Storage 13' 8" (4.20 m)  
Deployed (ground clearance) 1' (.3 m)  
Tests Successfully Passed\*  
3-50, 3-51, 3-52, 3-53  
UKTD49 - 68.5 mph (110 km/h)



## MODEL C

The Scorpion TMA Model C folds over the bed of flat bed, stake bed or dump trucks. The Scorpion TMA Model C provides TL-3 impact protection. Center or side mounts are also available



**MODEL C**  
(NCHRP-350, TL-3)  
Weight 2,200 lbs. (1000 kgs.)  
Length (from back of vehicle)  
Travel/Storage 2' 5" (.74 m)  
Deployed 13' 10" (4.21 m)  
Width 8' (2.45 m)  
Height (from ground)  
Travel/Storage 10' 6" (3.05 m)  
Deployed (ground clearance) 1' (.3 m)  
Tests Successfully Passed\*  
3-50, 3-51, 3-52, 3-53  
UKTD49 - 68.5 mph (110 km/h)

*\*TrafFix Devices Scorpion TMA has been tested and also PASSED a "worse case" side angle re-directive impact test, that goes beyond all governmental testing requirements. Full details are available upon request.*



SCORPION® TRUCK MOUNTED ATTENUATOR



# Protecting Workers and Motorist on the Highway





# Scorpion® TMA FAST-TRAK SwiftConnect™ Mounting System



Fast-Trak Lowboy works on trucks with Salt Spreaders



Fast-Trak w/30" Extension and Vertical Arrowboard Lift



Fast-Trak with TL-2 Scorpion

- Quickly and securely connect the Scorpion Truck Mounted Attenuator to any heavy-duty vehicle with the Fast-Trak SwiftConnect
- Fast-Trak SwiftConnect Eliminates the need for a single, dedicated Host Vehicle
- Connection/Disconnection is the fastest in the industry
- Fast-Trak SwiftConnect allows the Scorpion TMA to connect in as little as a minute
  1. Back up truck to Fast-Trak SwiftConnect
  2. Align mounting hooks over connection bars and lower in place
  3. Plug in electrical connections
  4. Crank jacks up and rotate for storage and insert locking pins
- Additional traks allow TMA to be installed on multiple vehicles in your fleet
- Safe and secure, the Fast-Trak SwiftConnect is easy to install on any of your flat bed or dump trucks.
- All steel construction provides excellent durability while the swift connection delivers maximum flexibility for your fleet.
- Another innovative engineering advancement from TrafFix Devices, Inc.

SCORPION® TRUCK MOUNTED ATTENUATOR

## Swift Connection



Back up truck to Fast-Trak SwiftConnect




Align mounting hooks over connection bars and lower in place



Plug in electrical connections



Crank jacks up and rotate for storage and insert locking pins



# Scorpion® TMA Mounting and Support

SCORPION® TMA MOUNTING AND SUPPORT

## Fast-Trak Mounting Choices



Fast-Trak SwiftConnect is available in 6", 12", 18", 24", 30" and 36" lengths. Other extension lengths available upon request.



*Fast-Trak SwiftConnect with 30" Extender Frame*

## Traditional Mounting Choices



*Standard Frame*



*12" Extension Frame*



*24" Extension Frame*

## Support Choices




*Dump Truck Side Support*



*Flat Bed Side Support*



*Flat Bed Center Support*



# High Reach Extension Frames

Used to gain additional vertical clearance over truck bed or equipment.




30" High Reach Extension Frame




6" High Reach Extension Frame

## SPECIFICATIONS

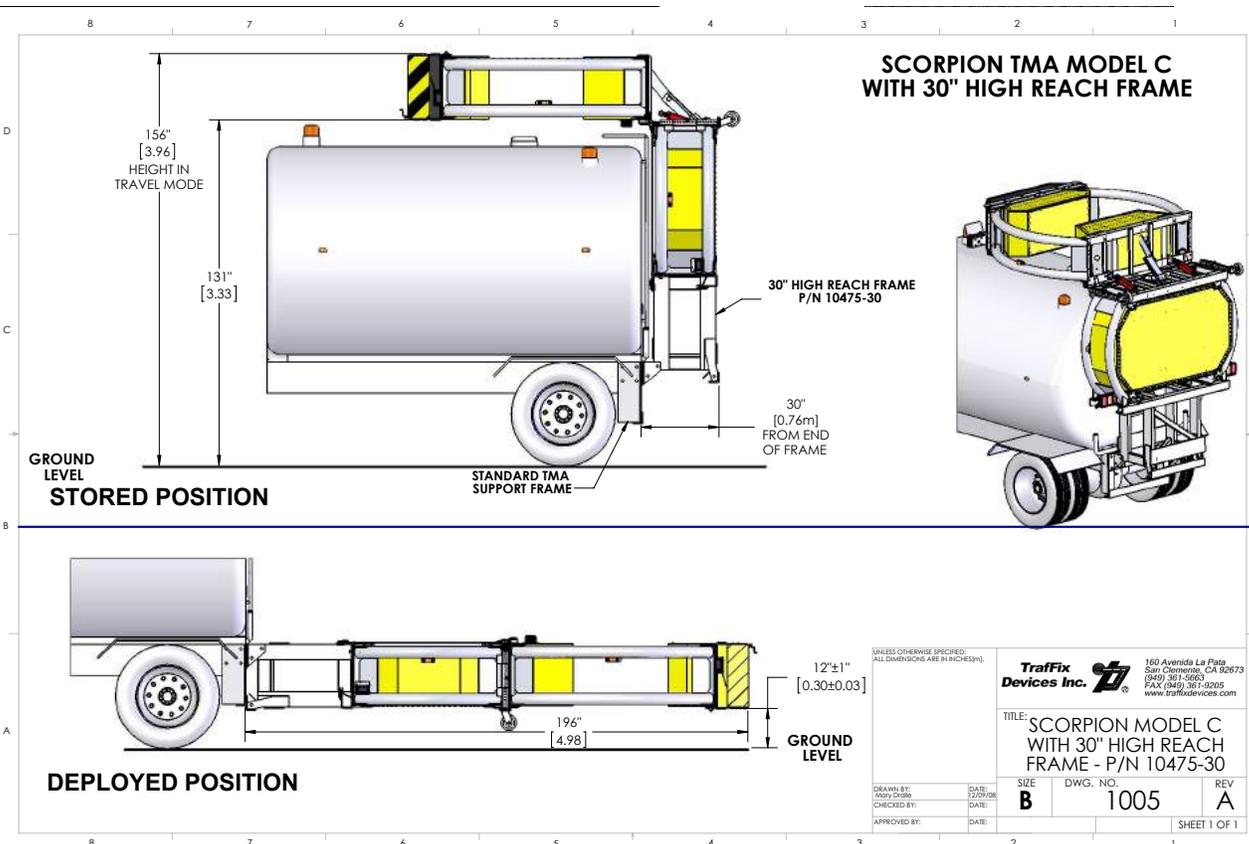

**Scorpion®**  
Truck Mounted Attenuator (TMA)

SCORPION® TMA ACCESSORIES



## Arrow/Message Board Mounting Systems



*Scorpion with 15 Light Arrow Board and Hydraulic Lift*



*Scorpion with Message Board and Hydraulic Lift*

## Hydraulic Lift Options for Arrow & Message Boards



*Traditional Hydraulic Vertical Lift*



*Fast-Track Hydraulic Vertical Lift*




*In-Cab Controller w/ 30' Cable Controls Scorpion™ & Hydraulic lift (Factory or Field Installation)*



*LED Tail Light Upgrade Kit*

Other options available from TrafFix Devices, Inc.  
Contact your Authorized Distributor for more details.



# Scorpion® Trailer Attenuator



SCORPION® TRAILER ATTENUATOR




*Scorpion TL-3 Trailer Attenuator with optional Arrow Board and Lift easily adapts to multiple trucks for efficient fleet management - Fast to hook up, has 45 degree turning radius, and is easy to tow and back up.*



*Scorpion TL-3 Trailer Attenuator with Telescoping Anti-Rotational System (TARS) allows for Single Point Attachment to Pintle Hook. The Tongue keeps the cushion positioned to attenuate "real world" angled and offset impacts efficiently without Trailer Rotation.*



*Scorpion TL-3 Trailer Attenuator with optional Arrow Board and Lift has great visibility to oncoming drivers and is full truck width for the best protection of workers, drivers and fleet assets. NCHRP 350 tested and accepted with arrow or message board.*




# Scorpion® Trailer Attenuator

## Features:

- NCHRP 350 tested and accepted for all mandatory and optional offset and angled impacts with host vehicle free standing, unblocked & unrestrained
- Only Trailer Attenuator to be tested and accepted with a 10,000 lb host vehicle
- Infinite weight tested and accepted allows the Scorpion Trailer to be used on heavy host vehicles with no upper weight limit
- During impact testing, Scorpion Trailer stayed attached to the host truck and never became detached from the pintle hook
- Single point attachment to standard 20 Ton (minimum) rated pintle hook is quick and easy
- Telescoping Anti-Rotational System (TARS™) eliminates Scorpion Trailer rotation during angled and offset impacts, preventing trailer separation from host vehicle
- Requires little or no modification or additional mounting hardware to host vehicle
- The Scorpion's proven modular design crushes in progressive stages allowing quick and economical replacement of damaged parts
- The unique curved design gives full width protection to the back of the host vehicle and shields the deadly "coffin corners" of the truck
- Rear axle placement improves trailer stability and prevents the tail from "bottoming out" on driveways or uneven surfaces
- NCHRP Tested and accepted with optional Arrow or Message Board, which can easily be attached to Scorpion Trailer Attenuator







# Telescoping Anti-Rotation System (TARS™)

## Pre-Impact Condition

## Post-Impact Condition

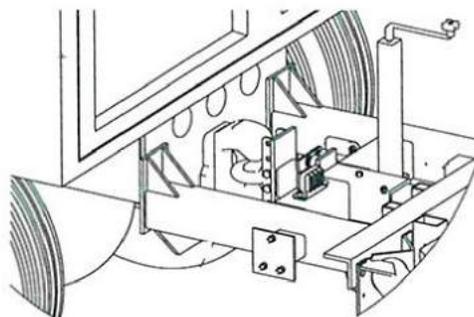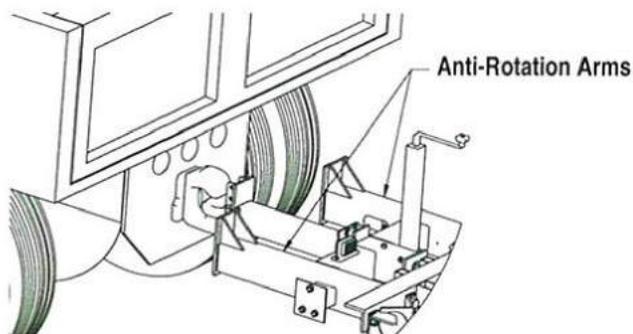


The Scorpion Trailer attaches directly to the pintle hook. It does not require additional installation, or truck modification, beyond standard factory installed pintle hook and 1/2 minimum" steel frame plate.

Upon impact, two heavy duty anti-rotation arms are driven against the frame plate, preventing angular rotation of the Scorpion Trailer during an accident.


### TL- 3, Test 3-52 Offset Angle Impact Test

4,500 lb vehicle impacts 20,000 lb host vehicle at 62.5 mph (100 kph)

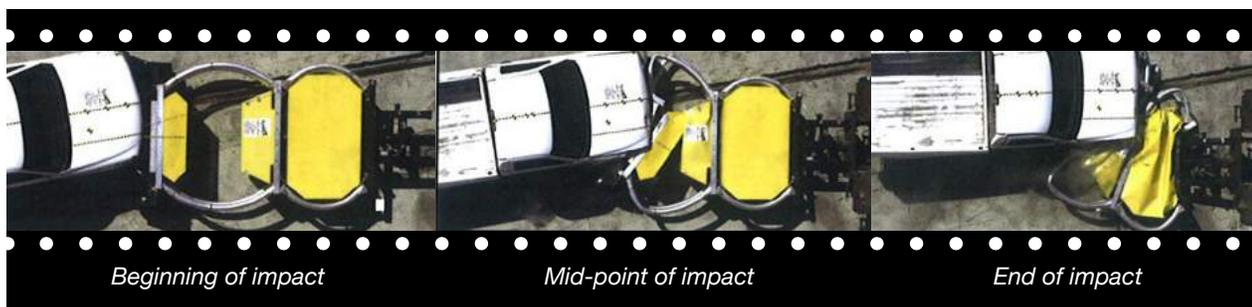


### TL- 3, Test 3-51m Inline Impact Test

4,500 lb vehicle impacts 10,000 lb host vehicle at 62.5 mph (100 kph)

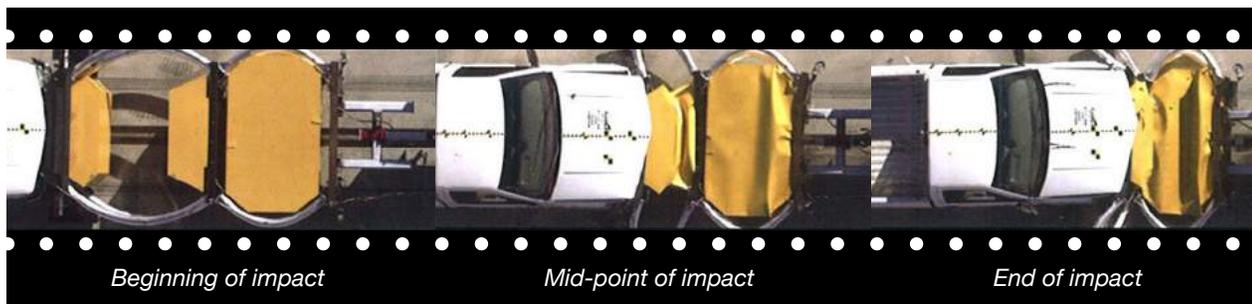


SCORPION® TRAILER ATTENUATOR



# Scorpion<sup>®</sup> Trailer Attenuator

## SPECIFICATIONS



SCORPION<sup>®</sup> TRAILER ATTENUATOR

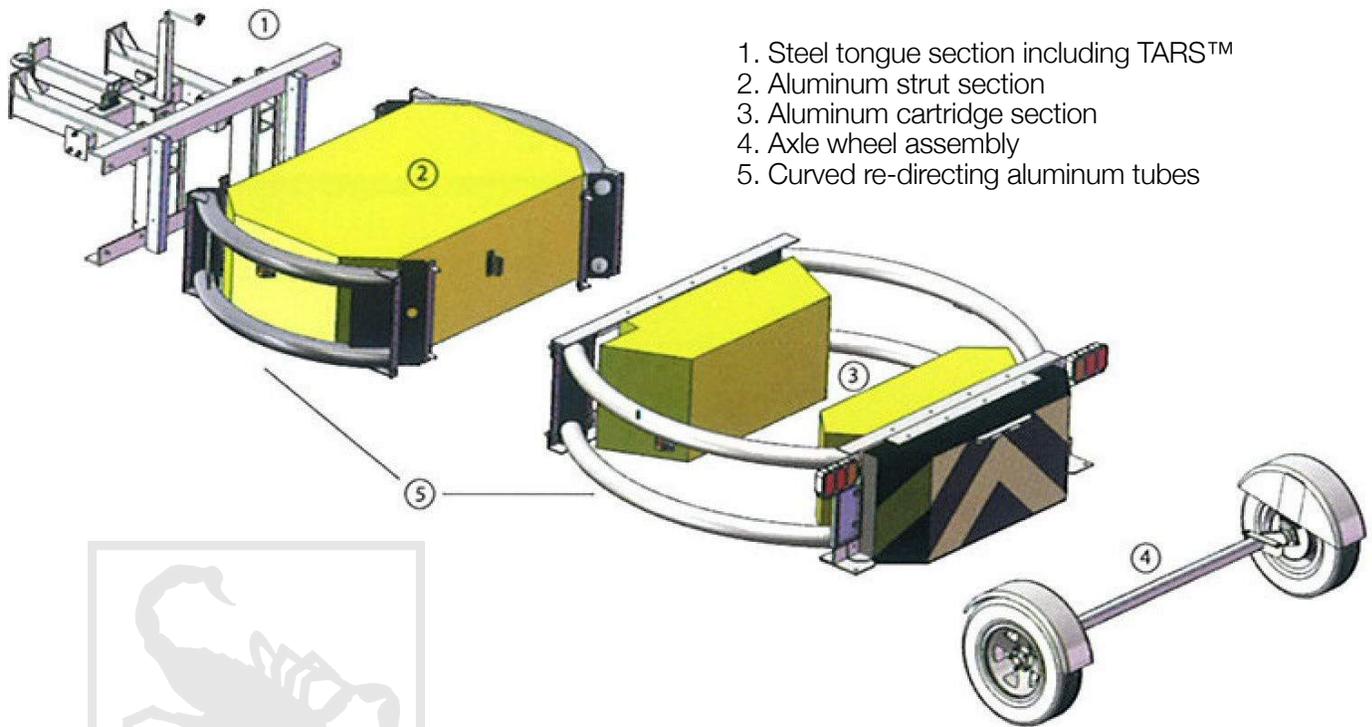

1. Steel tongue section including TARSTM
2. Aluminum strut section
3. Aluminum cartridge section
4. Axle wheel assembly
5. Curved re-directing aluminum tubes



	TL-2	TL-3
• Length	12' 7"	17' 5"
• Width	96"	96"
• Height	36"	36"
• Weight	1,460 lbs	1,900 lbs

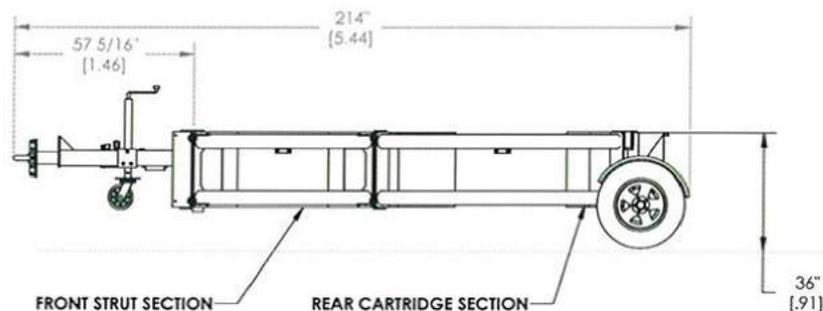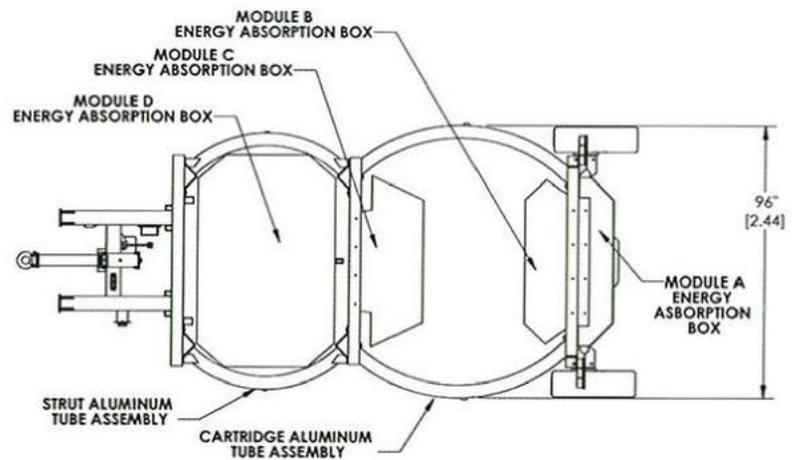

# TraFFix Big Sandy® Impact Attenuator Sand Barrels



BIG SANDY®

Now there is an Impact Attenuator Sand Barrel that is easy to move and provides external verification of the barrels correct weight of sand.



**#48210**  
2100 lbs./953 kg.

**#48140**  
1400 lbs./635 kg.


**#48247S (top half barrel)**  
**#48247P (pedestal only)**  
700 lbs./318 kg.  
400 lbs./181 kg.  
200 lbs./91 kg.



*Big Sandy® barrels in use.*

## Features:

- Three barrels are used to create all of the weights used in current standard array setups (200, 400, 700, 1400 & 2100 lbs (90, 180, 320, 640 & 960 kg)
- Combination barrel utilizes a pedestal base and 200, 400, 700 lbs. (90, 180, 320 kgs) top half barrel to obtain weights without using shelves or cone inserts – eliminates leaking sand.
- Simply fill the sand to the molded-in fill line to obtain the correct weight. The molded-in fill line makes external verification of weights easy.
- Reinforced lip prevents barrels from deforming when filled and provides a quick and secure fit of reinforced lid.
- All three Big Sandy Sand Barrel sizes are easily lifted, moved and emptied with the optional TraFFix Lifting Ring.
- NCHRP 350 tested and accepted
- Big Sandy barrels stack tightly, allowing you to put more on a truck than other competing brands.
- Big Sandy's wide stance allows for more stable barrel without becoming top heavy or tipping



BIG SANDY®

TrafFix  
Devices Inc. 

# Big Sandy® Lifting Ring



#48001-LR

## Features:

- Engineered to safely lift filled TrafFix "Big Sandy" Sand Barrels
- Adjusts to lift 200, 400 & 700 lb combination barrel and the 1400 & 2100 lb barrel (90, 180, 320, 640 & 960 kg)
- Easily lifts with a forklift, truck mounted crane or a knuckle boom
- Lightweight (62 pounds) aluminum construction
- Designed for TrafFix "Big Sandy" Barrels only



# Typical Sand Barrel Arrays for Different Posted Speeds

BIG SANDY®

25 mph 40 kph	21	14	14										
30 mph 48 kph	21	14	14	14									
35 mph 56 kph	21	14	14	14	7								
40 mph 64 kph	21	14	14	14	7	4							
45 mph 72 kph	21	14	14	14	14	7	4						
50 mph 80 kph	21	14	14	14	14	7	4	2					
55 mph 89 kph	21	14	14	14	7	7	4	2	2				
** 62 mph 100 kph	21	14	7	7	7	4	4	2					
65 mph 105 kph	21	14	14	7	4	4	2	4	2	2	2	2	2
70 mph 113 kph	21	14	14	14	7	4	2	4	2	2	2	2	2


\*\* NCHRP 350 Tested 12 Barrel Array

Key: Numbers indicate weights in hundreds of pounds required for each sand barrel in the array.

- 21 2100 lb. = 953 kg.
- 14 1400 lb. = 635 kg.
- 7 700 lb. = 318 kg.
- 4 400 lb. = 181 kg.
- 2 200 lb. = 91 kg.

This drawing is an example of a typical array plan and should in no way override what is specified by your Local or State Traffic Engineer. Contact your Local or State Traffic Engineer for specific site recommendations for each situation and location.





# Water-Wall™

## Water-Filled Barrier



TRAFFIX WATER-WALL™




#45032-O

#45032-W

### Features:

- Tested and Passed NCHRP 350 TL-1 Barrier Wall, TL-2 Longitudinal Channelizing Device & TL-3 Barricade
- Durable Linear low density polyethylene plastic minimizes cracking and breaking
- Double wall knuckle design minimizes breakage at hinge points
- Hinge design allows for a 30-degree pivot between sections
- Large 8" fill hole speeds filling process, includes twist-lock plastic cap
- New tamper resistant, offset drain plug with coarse buttress thread — screws in or out in only 2 1/2 turns
- Includes one steel connection pin & Keeper pin per wall that allows sections to be locked together
- Forklift and pallet jack slots are molded in for easy movement
- Standard colors are orange/red or white — additional colors available upon request
- Accepts the Water-Wall Chain Link Fence for additional job site security



30-degree pivoting hinge design allows the Traffic Water-Wall to handle curved roads.



Large 8" fill hole speeds filling process, includes twist-lock plastic cap. **#18009**



New tamper resistant, offset drain plug with coarse buttress thread. **#45033-RC-B**



Water-Wall stacks for storage and transportation.



Water-Wall can pivot 30-degrees and be locked together with steel connection pins. **Connection Pin, #45032-CP**



Water-Wall can be easily lifted and placed using a forklift or pallet jack.

**NCHRP 350 Approved As:**


- TL-1 Longitudinal Barrier – HSA-10/B-130
- TL-2 Longitudinal Channelizing Device – HSA-10/WZ-224
- TL-3 Barricade – HSA-10/WZ-224

**Specifications**

Length	72"
Height	32"
Width	18"
Weight (empty)	80 lbs
Weight (filled w/water)	1,110 lbs
Material	Linear Low Density Polyethylene
Color	Orange/Red or White



Water-Wall also works great for special events



# WWF

**Water-Wall Fence™**




*Water-Wall Fence Rotates up to 30° Degrees*



*T-Pin Connects Wall to Wall and Fence to Fence*



*Secure Pedestrian entry with a 6' Single Gate, or Drive-Thru entry with a 12' Double Gate*

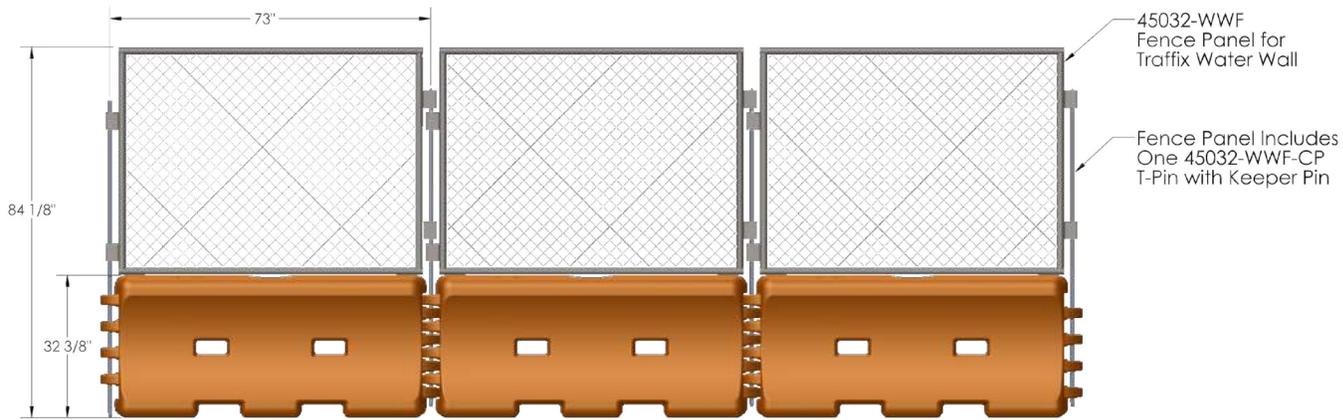


Description	Dimensions
WW Fence Panels	4' Tall x 6' Wide
6' Single Gate (includes two Gate Attachment Frames)	6' Tall x 6' Wide
12' Double Gate (includes two Gate Attachment Frames)	6' x 12' Wide
Gate Attachment Frame	
T-Pin with Keeper Pin	6' Length
Water-Wall (White)	72" w x 32" h
Water-Wall (Orange)	72" w x 32" h



*Ideal for vertical construction. Secure and easy to deploy.*




*Fence can be Screened for Greater Security*




# Sentry™

## Water-Cable Barrier

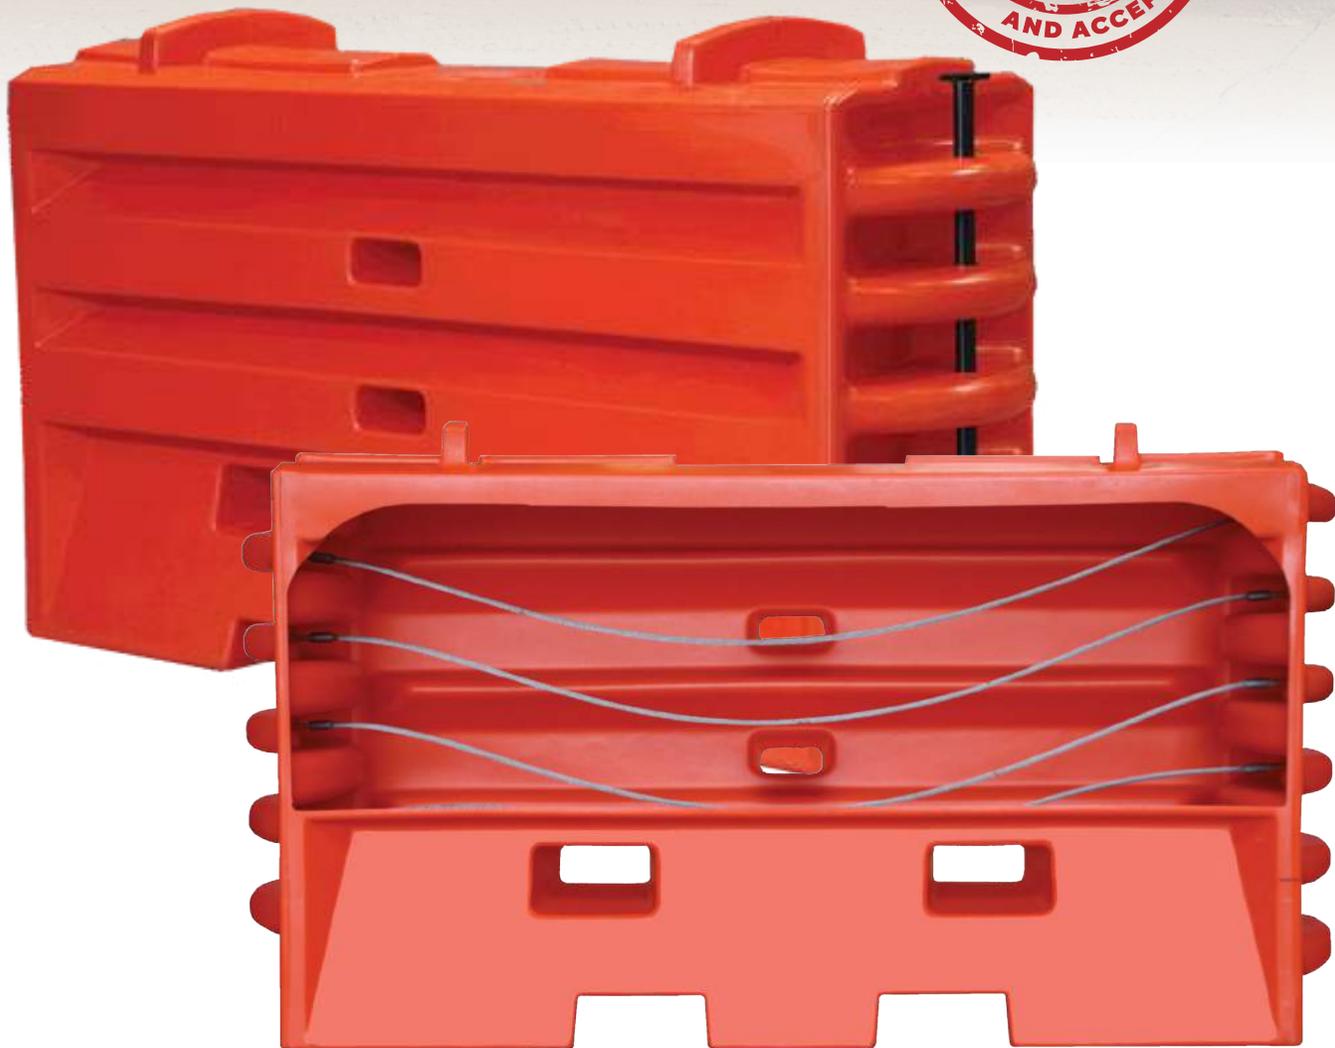


TRAFFIX SENTRY™ WATER-CABLE BARRIER



TRAFFIX SENTRY™ WATER-CABLE BARRIER



One Soft Wall Does it All...

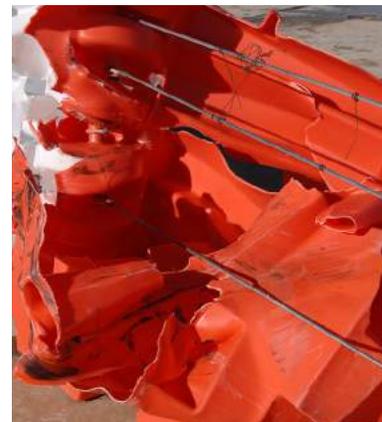

**Sentry™**  
*Water-Cable Barrier*

4,409 lbs (2,000 kg) at 25° Impact Angle and 45 mph (70 kph)  
Deflections - TL-2 45 mph (70 km/h) - only 5.9 feet (1.80 m)  
Deflections - TL-3 62.5 mph (100 km/h) - only 9 feet (2.74 m)





**#45032-W**

*Sentry has three (3) Longitudinal Saw Tooth Ribs to keep impacting vehicle from climbing*



**Features:**

- The Sentry Water-Cable Barrier Wall has been tested and passed all TL-2 & TL-3 light weight 1,807lbs (820kg) and heavy weight 4,409 lbs (2,000kg) impacts at 45mph (70kph) and 62.5mph (100kph) impacts.
- Sentry, when filled with 220 gallons (9160 liters) of water weights approximately 2,000 lbs (907kg), and is 42" (107cm) tall, 72" (183cm) long and 22.5" (57cm) wide.
- Sentry's eleven interlocking knuckles on each end are positively linked together with a 1 1/16" (3cm) diameter hollow steel T-pin with a steel keeper at the bottom end.
- The (4) internal cables prevent the impacting vehicle from penetrating the barrier wall. At each cable end is a corrosion resistant steel bushing. Integrally molded into the Sentry are four 3/8" (9.5mm) diameter stranded steel cables, galvanized for corrosion resistance.
- The bushing is wrapped 360° around its O.D. with a loop of the 3/8" (9.5mm) diameter stranded steel cable. The bushing and cable assemblies are integrally molded into the connecting lugs, at four of the lug positions, at each end of the barrier wall.

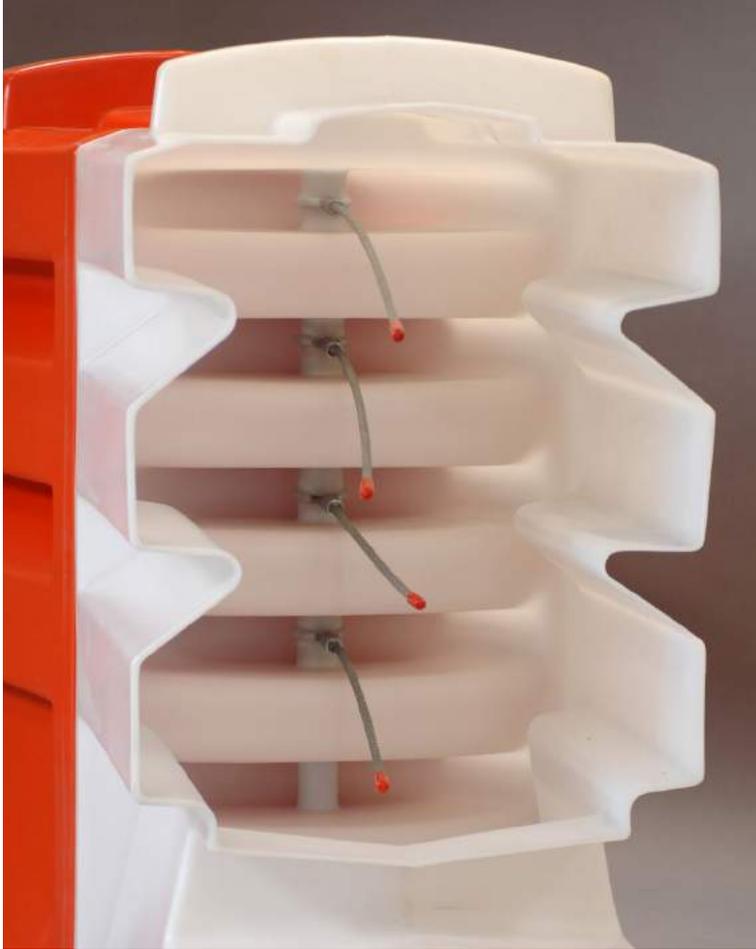

Cutaway Showing Four Integrally Molded Cables & Bushings.



Pinned Walls Rotated at 15°.



8" diameter Water Fill Hole. #18009



1-1/2 Turn, Quick Out Drain Plug w/Butress Thread. #45033-RC-B

Specifications	
Length	76"
Height	43"
Width	22"
Weight (empty)	160 lbs
Weight (filled w/water)	2,000 lbs
Material	Polyethylene
Color	Orange or White



Optional Drive By Float Lid available. Shows if the wall is properly filled. #18009

**Sentry™**  
Water-Cable Barrier



SLED™



# SLED™


## Sentry Longitudinal Energy Dissipater



#45044-Y-CIS

### Features:

- FHWA Accepted for Shielding the Blunt End of Concrete, Steel and Water Filled Barriers
- Quick and Easy Set-Up, No Foundation Anchoring, Minimized Installation Exposure Time
- Cost Effective End Treatment for Concrete, Steel or Water Filled Barriers
- Universal Transition Quickly and Easily Attaches to a Variety of Barrier Shapes and Sizes
- SLED's Stout Design Virtually Eliminates Vaulting
- Narrow Footprint is Ideal for Work Zones or Roads with Minimal Shoulder Spacing
- Shortest TL-3 Water Filled Crash Cushion, Fewer Incidental Impacts
- Containment Impact SLED Minimizes Debris Field
- Visual "Drive By" Fill Indicators Quickly Verify Water Module's are Properly Filled
- FHWA Accepted for Use in Uni and Bi-Directional Applications
- Internal Steel Cables Help Guide Vehicle After an Impact, creating a Truly "Limited Gating" System
- SLED End Treatments Requires no Anchors on Roadway or Bridge Deck.




SLED™

## SLED™ Sentry Longitudinal Energy Dissipater

The Sentry Longitudinal Energy Dissipater (SLED) is a narrow, non-redirective gating crash cushion. SLED is designed to shield the end of all permanent and temporary portable barrier shapes including concrete, steel and plastic. SLED's unique design incorporates four internal steel cables which help envelop the impacting vehicle, reducing the possibility of secondary accidents. The SLED End Treatment does not require foundation anchor bolts to be attached to the road or bridge deck. The complete crash cushion can be installed quickly, with as little as one pick up truck and two workers on compacted dirt, gravel, decomposed granite, asphalt or concrete.

Each SLED module is manufactured from a high visibility yellow polyethylene that is UV stabilized to minimize degradation. It is designed to deform and rupture on impact, absorbing the energy of the errant vehicle. The SLED has the most versatile transition for shielding all permanent and temporary portable barriers. The combination of hinging and contouring, allows the transition panels of the SLED End Treatment to be attached to narrow, wide or other profile shapes with either converging, or diverging angles, up to 10 degrees.

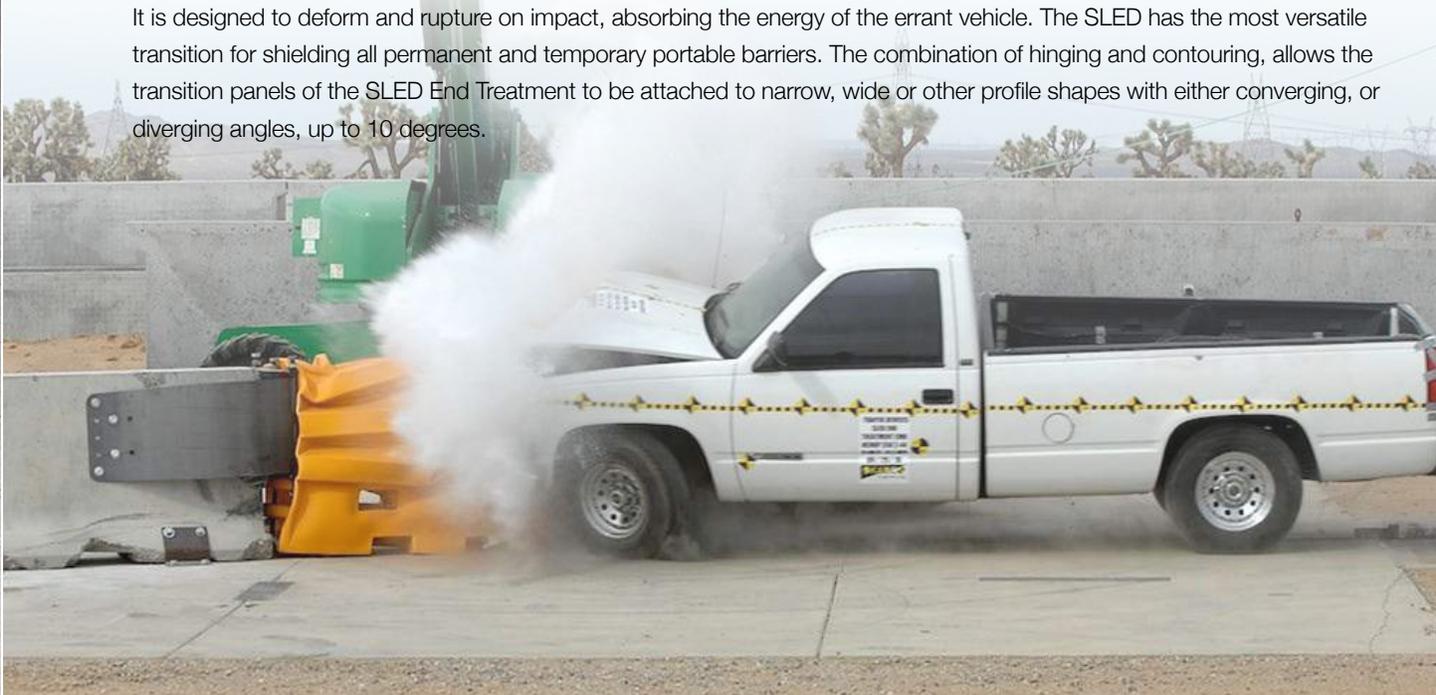

SLED™ TL-3 4500 lb. Pick-Up Truck Impact Attached to Concrete Median Barrier Wall



Inline TL-3 Truck Test Pre Impact



Inline TL-3 Truck Test Post Impact




**SLED™**  
Sentry Longitudinal  
Energy Dissipater




SLED™

**TL-1 Configuration**

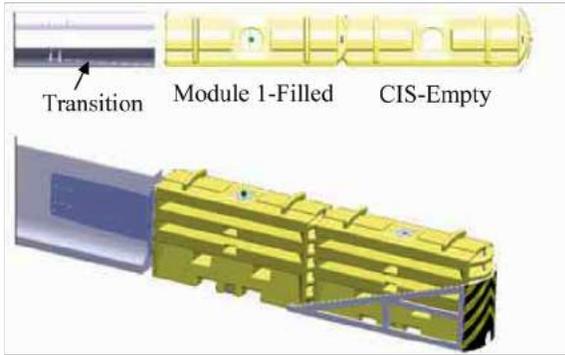


*Complete SLED™ TL-3 System  
Transports in a Pick-Up Truck*

**TL-2 Configuration**

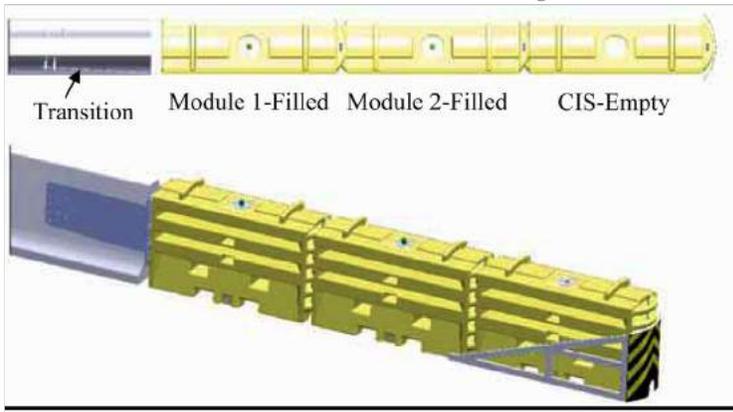

**TL-3 Configuration**

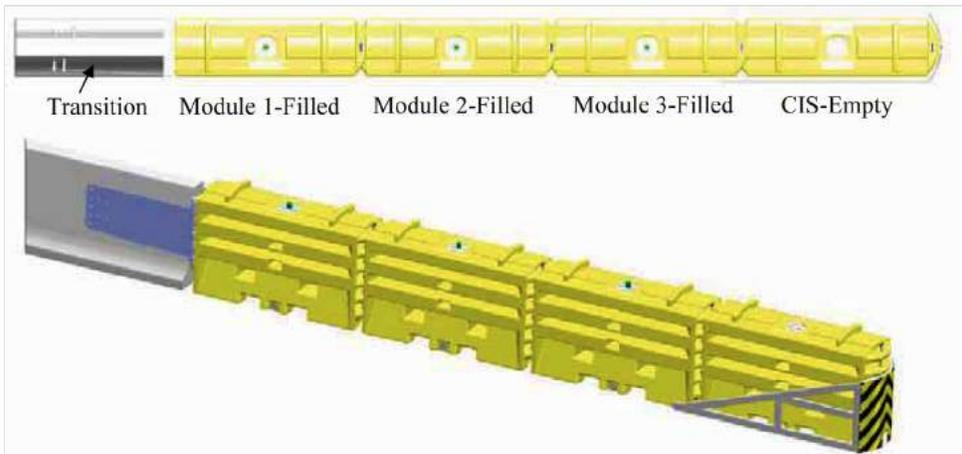

**TL-3 Specifications**

Length	25'-6"
Height	43"
Width:	27"
Weight (Empty):	995 lb.
Weight (Full):	6505 lb.




*Steel Barrier Attachment*



*Concrete Barrier Attachment*



*SLED™ Internal Cables*



SLED™



**SLED™**  
Sentry Longitudinal  
Energy Dissipater

**Sentry™**  
Water-Cable Barrier



SLED CIS Module Connects to Sentry Water-Cable Barrier

### Features:

- Cost Effective End Treatment to Existing Sentry Water-Cable Barrier to provide TL-1, TL-2 or TL-3 Performance
- FHWA Accepted for Shielding the blunt end of the Water Filled Barriers
- Shortest Length TL-3 Crash Cushion Results in Fewer Incidental Impacts
- Containment Impact SLED Minimizes Debris Field Upon Impact
- Narrow Footprint is Ideal for Work Zones or Roads with Minimal Shoulder Spacing
- No Need for Additional Plastic Water-Filled Modules to Create Flared End Treatment



# SLED™ Installations Throughout North America

SLED™



**SLED™**  
Sentry Longitudinal Energy Dissipater



SLED™ TL-3 in Georgia



SLED™ TL-3 in New Mexico



SLED™ TL-2 in Philadelphia



SLED™ TL-2 in Illinois




SLED™ TL-3 in Texas



SLED™





# SLED™ mini




## Features:

- MASH Tested and Accepted as a TL-1 End Treatment for TrafFix Water Wall™
- MASH Tested and Accepted for Uni and Bi-Directional Applications
- A Single Internal Steel Cable Prevents the Impacting Vehicle From Penetrating the Barrier Wall
- Stout Design Virtually Eliminates Vaulting of the Impacting Vehicle
- Containment Impact Sled (CIS) Minimizes Debris Field
- Quick and Easy Setup Minimizes Installation and Worker Exposure Time
- No Foundation Anchoring Required
- Narrow Width is Ideal for Lower Speed Work Zones or roads with Minimal Shoulder Spacing



SLED™ MINI



# SLED™

## EURO-TERMINAL

*Sentry Longitudinal Energy Dissipater*




### Features:


- SLED Euro-Terminal Offers a Safe and Effective End Treatment For Turned Down or Blunt Barrier Ends
- EN 1317-4 P4 Accepted for Shielding the Blunt End of Steel, Concrete & Water Filled Barriers
- Quick and Easy Set-Up, No Foundation Anchoring, Minimized Installation Exposure Time
- Cost Effective End Treatment for Concrete, Steel or Water Filled Barriers
- Barrier Specific Transitions Quickly and Easily Attach to the Most Popular Steel Barriers and Concrete
- SLED's Stout Design Virtually Eliminates Vaulting
- Narrow Footprint is Ideal for Work Zones or Roads with Minimal Shoulder Spacing
- Short Length reduces the chance for incidental Contact
- Containment Impact SLED Minimizes Debris Field
- Visual "Drive By" Fill Indicators Quickly Verify Water Module's are Properly Filled
- Internal Steel Cables Link all Components, Thereby Minimizing Vehicle Intrusion Into the Work Zone
- SLED End Treatment Requires no Anchors on Roadway or Bridge Deck



# Tested and Accepted

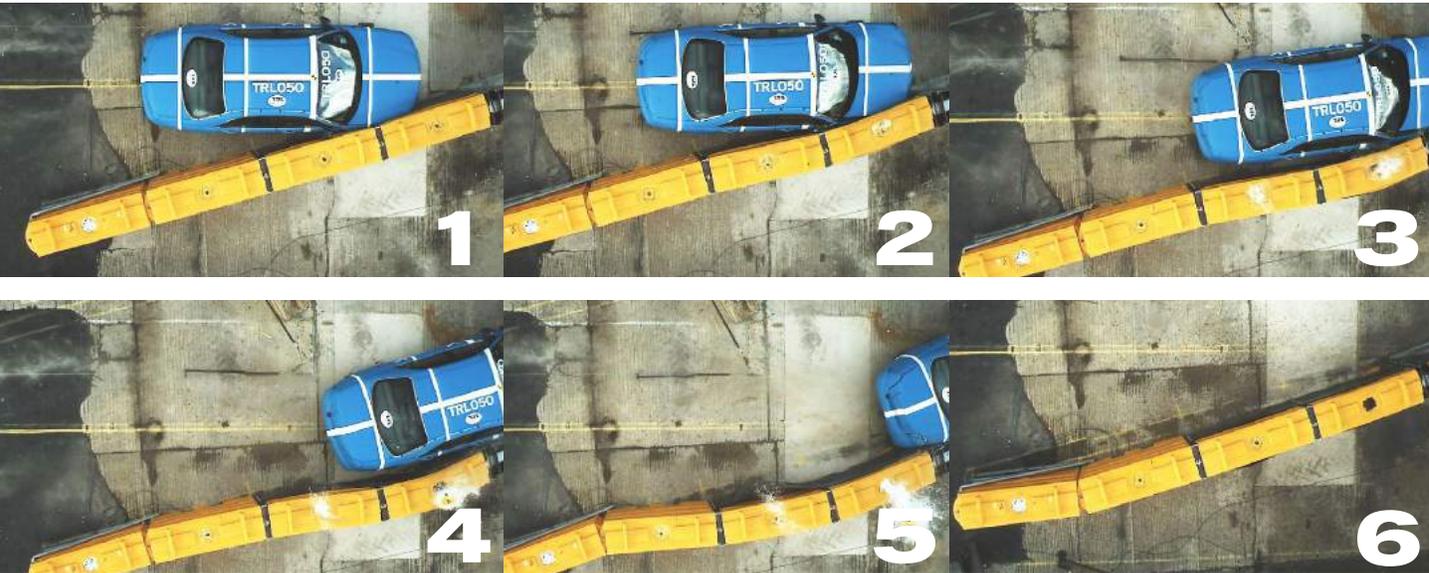


**Tested and Accepted: EN1317-4 P4 Impact Speed: 110 kph Vehicle Type: 1500 kg Bullet**  
 Vehicle Impact Angle: 15° Side

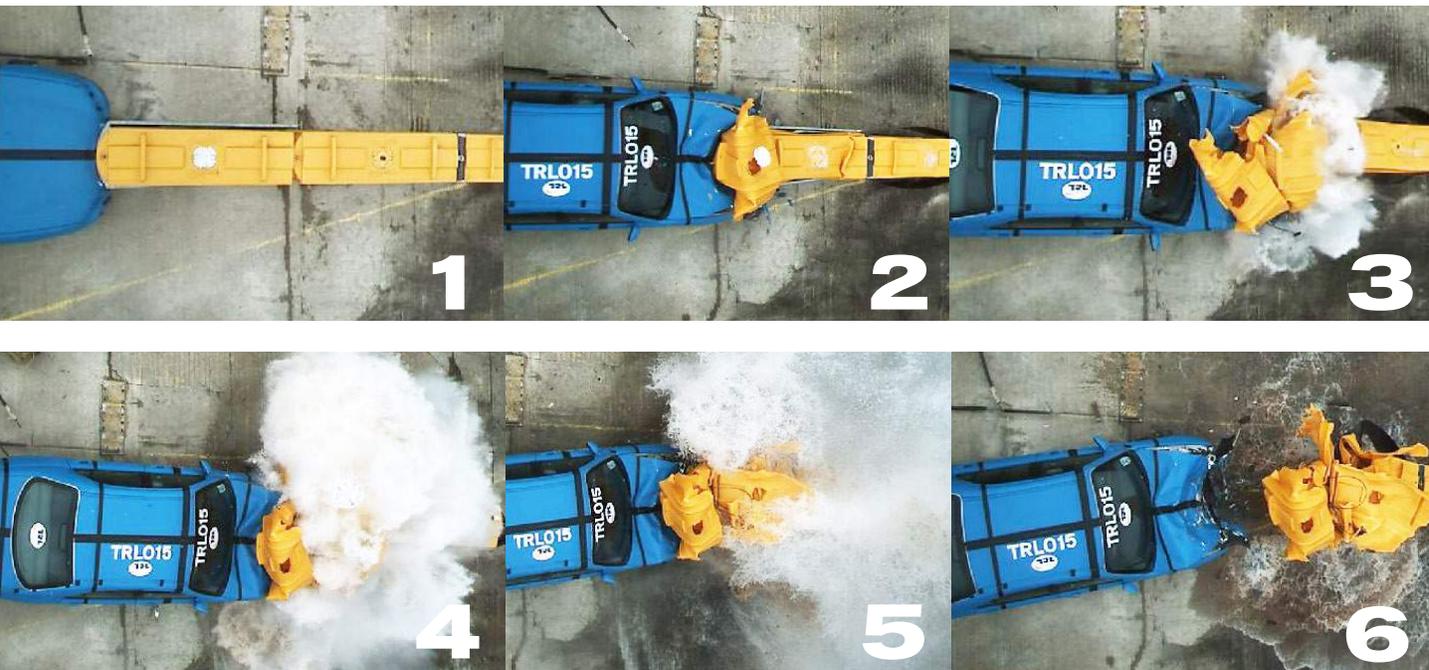

**Tested and Accepted: EN1317-4 P4 Impact Speed: 110 kph Vehicle Type: 1500 kg Bullet**  
 Vehicle Impact Angle: Head-On Centre

SLED™ EURO-TERMINAL



SLED™ EURO-TERMINAL



Traffix Devices is the first to produce a temporary device (Euro-Terminal) to pass these tests for EN 1317-4 P4






TM

## SLED™ EURO-TERMINAL Sentry Longitudinal Energy Dissipater

The SLED EURO-TERMINAL is a narrow water filled attenuation device designed to shield the end of safety barriers in frontal and side impacts. The SLED EURO-TERMINAL's unique Containment Impact Sled (CIS), safely brings an impacting vehicle to a controlled stop and prevents the vehicle from vaulting, while containing the plastic debris within the steel CIS frame structure. The side safety panels and internal steel cables re-direct an impacting vehicle away from the blunt barrier end.

The SLED EURO-TERMINAL is the only free standing attenuation device that has been tested and accepted to EN1317-4 P4 requirements. Since the system is free standing, there are no pavement anchors, bolts or drilling to compromise the integrity of the roadway surface or bridge deck. The complete P4 SLED EURO-TERMINAL can be installed quickly with as little as one lorry and two workers and is designed to be placed on compacted dirt, gravel, decomposed granite, asphalt, or concrete.

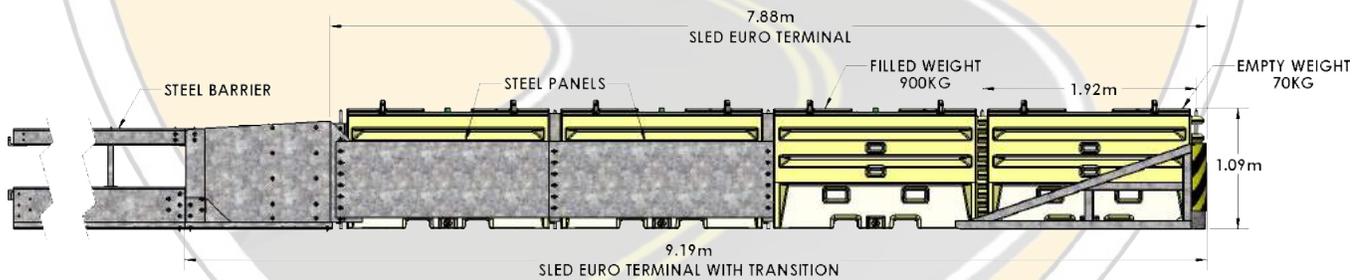

TT 2.1.100  
Head on nose 1/4 offset to roadside  
Vehicle Mass = 900 kg  
Velocity = 100 Km/h

TT 1.3.110  
Head on centre  
Vehicle Mass = 1500 kg  
Velocity = 110 Km/h


TT 4.3.110  
Side, 15 degree  
Vehicle Mass = 1500 kg  
Velocity = 110 Km/h

TT 5.1.100  
Side, 15 degree (reverse impact)  
Vehicle Mass = 900 kg  
Velocity = 110 Km/h

# Saving Lives with the SLED™ EURO-TERMINAL



*Solves Vehicle Vaulting From Impacting Turn-Down Ends*



**COMPRESSOR**  
**UNI-BASE**®



### Features:

- The FHWA Categorizes the Compressor as a self restoring, Low Maintenance, Attenuator designed to take repeated impacts with minimal or no repairs
- Overall length 21' 6" – Shortest TL-3 Self Restoring Attenuator Available
- Delivered assembled and ready to install – eliminates on-site assembly
- Corrosion resistant solid steel Uni-Base™ requires only 30 bolts to secure Compressor to the road
- Compressor's assembled design combined with the Uni-Base™ construction makes job site installation fast, easy and safe – one crew can safely install several units in one day
- Compressor's specially formulated attenuator modules are injection molded from HDPE plastic and are designed to more efficiently absorb energy in a shorter distance
- Attenuator modules are pre-flattened to provide more consistent results after repeated impacts
- Compressor's telescoping ultra high strength steel side panels re-direct side impacts
- Can easily be installed into Concrete or Asphalt or both in a minimal amount of time
- Compressor has no Sacrificial Parts which means after most hits, its ready for another impact without having to be reset or repaired





**COMPRESSOR**

## AFTER IMPACT...



- After most impacts, The Compressor self restores and requires zero maintenance
- Even when the Compressor has not fully restored, it continues to provide protection to the motorist from the blunt ends of concrete or steel barrier
- On the rare occasion that the Compressor does not fully restore, raised yellow lids will indicate the need for minimal pull-back to full length
- With a heavy-duty chain and truck, simply pull back the Compressor to full length and hold for Five minutes
- Lane closures and extended exposure for highway workers to oncoming traffic is reduced significantly



COMPRESSOR®


# SPECIFICATIONS

COMPRESSOR®

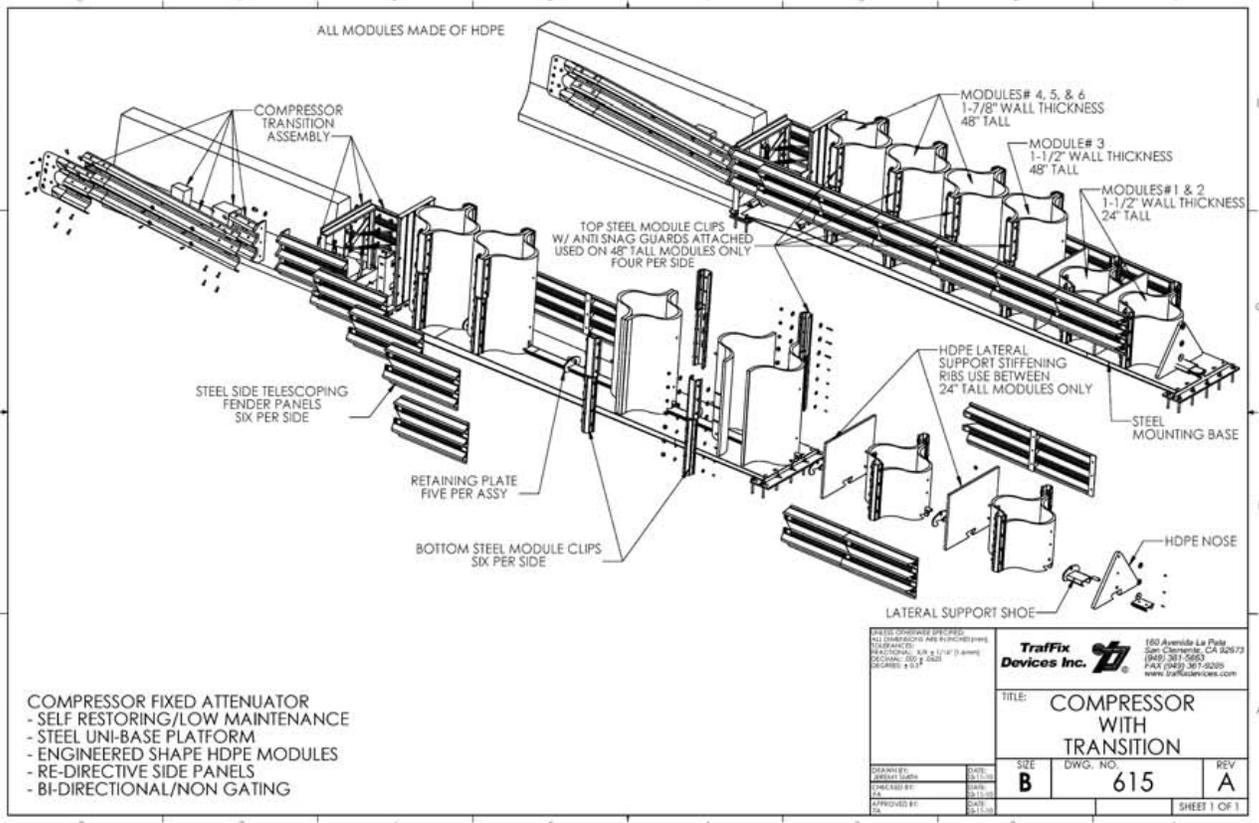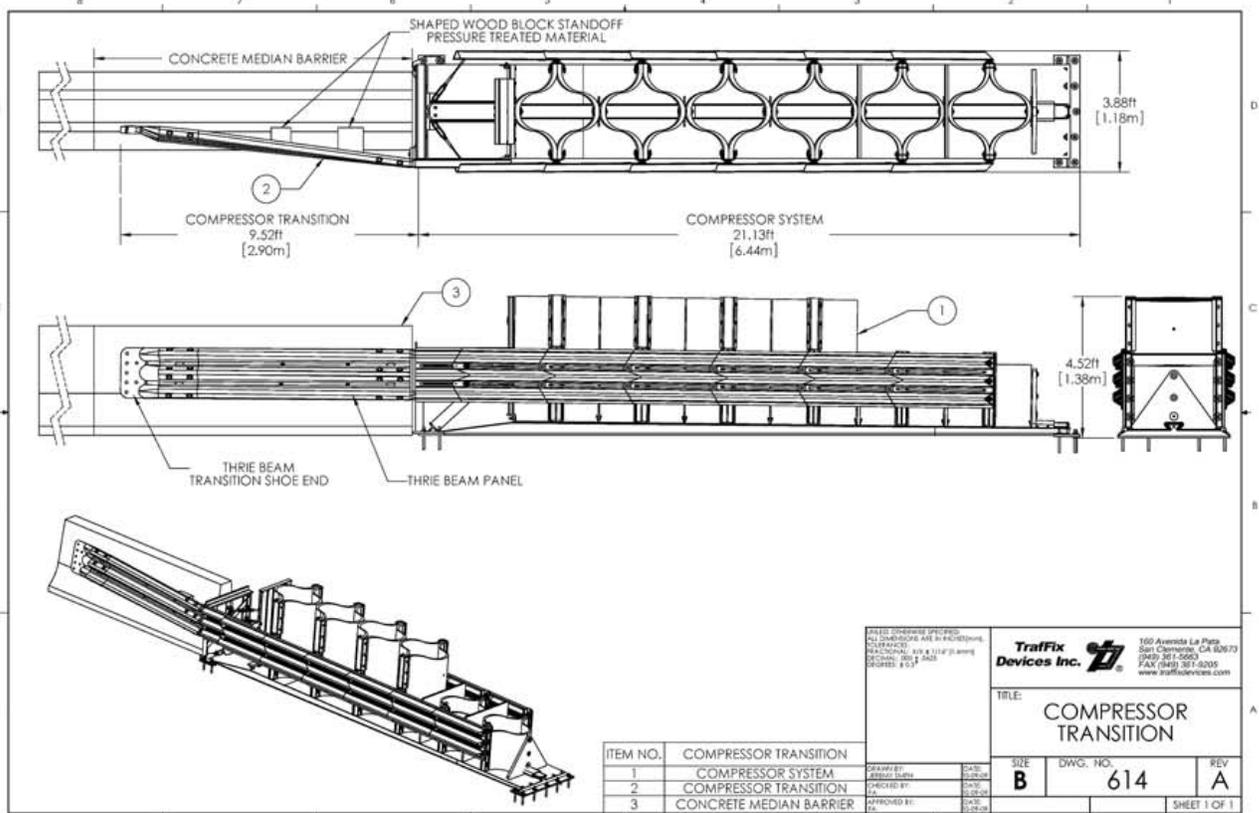




COMPRESSOR®

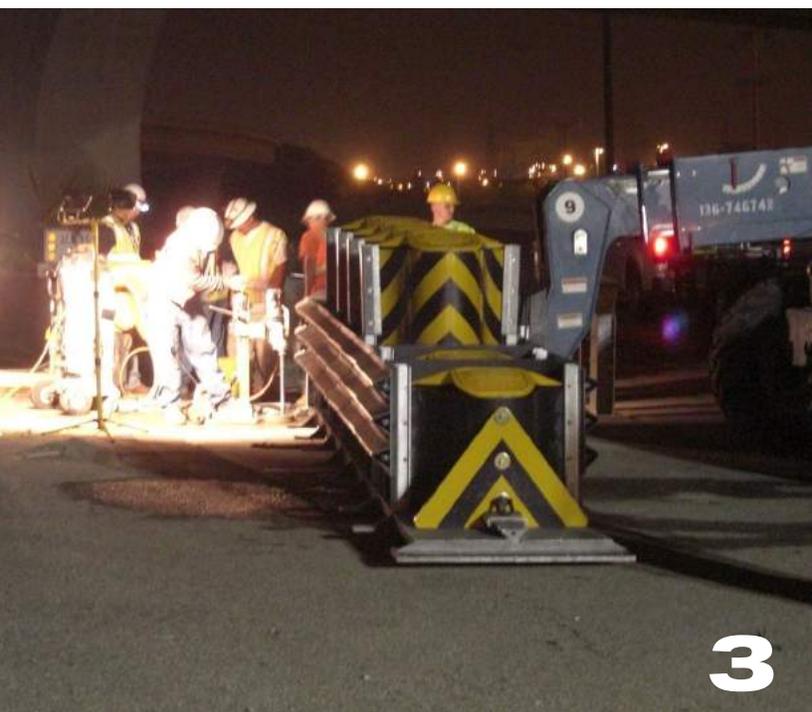

## Ease of Installation

1. Compressor ships to the site fully assembled.
2. A lift truck is used to move the Compressor from flatbed to installation site.
3. Once positioned, the Compressor is attached to the blunt end with transition panels.
4. Simply drill holes and anchor the Compressor with concrete or asphalt anchor kit.



# Transition Installations

COMPRESSOR®



W Beam Guard Rail



Concrete Transition




W Beam Installation



Standard Thrie Beam




**Q: What is the Safest Attenuator on the Road Today?**

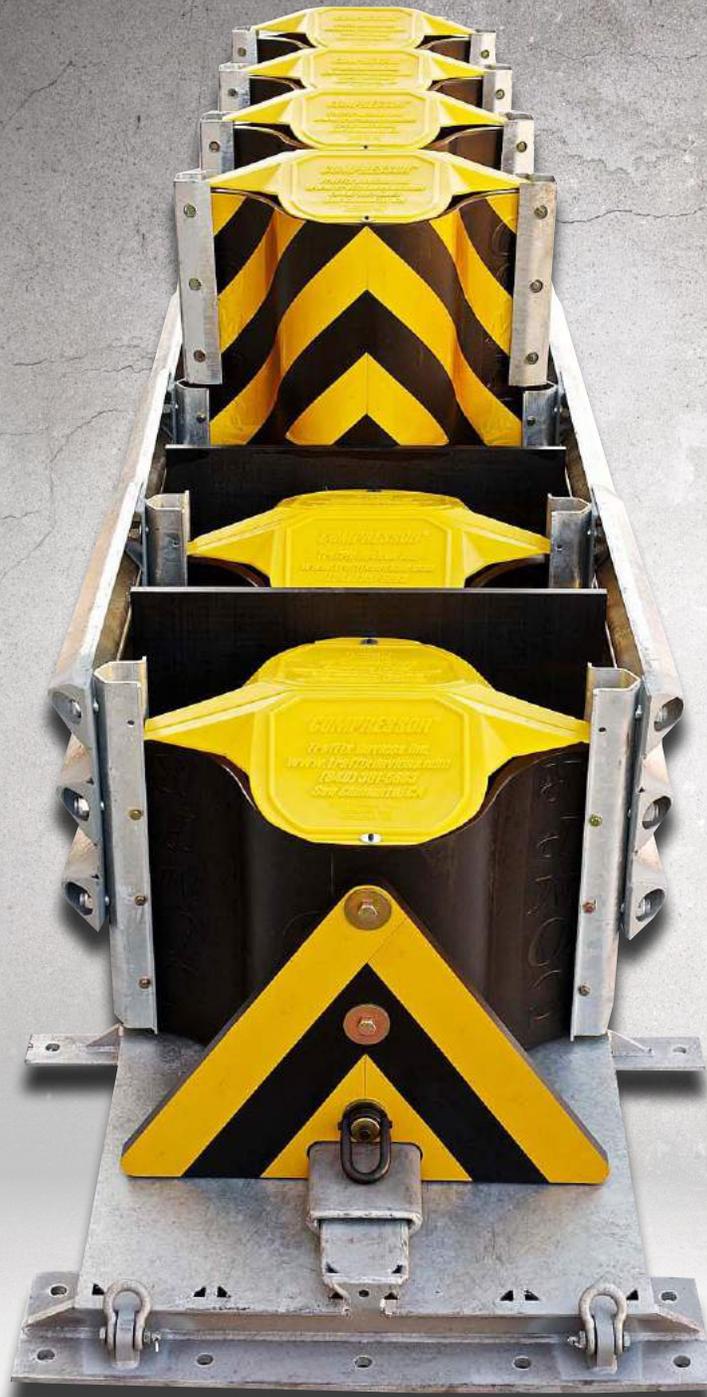

**A: The Compressor . . . because after most impacts, without repairs or resetting, is ready for the next hit.**

**COMPRESSOR**




# NOTES

TRAFFIX DEVICES INC.

Lined area for notes with a large, faint watermark of the TrafficFix logo and a registered trademark symbol (®).

# See Our Other Products

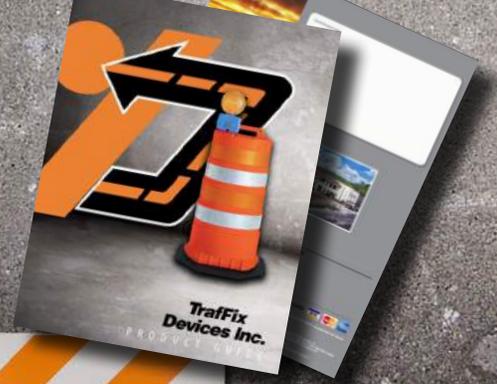

 Trifix Channelizer Products



 Trifix Barricade Products



 Trifix Signs and Stands



 Trifix Other Products


FOLLOW US



**TraFFix  
Devices Inc.**



DISTRIBUTED BY:




**MS FOSTER**

SERVING THE TRANSPORTATION INDUSTRY

We accept Visa, MasterCard and American Express



5000 Cassville Rd., Suite 200, Columbus, IN 47332  
Phone: 888.452.4053  
Fax: 219.879.9313  
www.msfooster.com

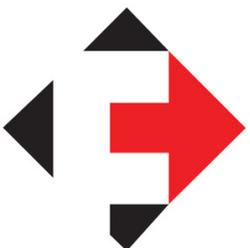

**MS FOSTER**

SERVING THE TRANSPORTATION INDUSTRY

1040 Highway 212  
Michigan City, IN 46360

OFFICE 219.879.9225  
TOLL FREE 888.452.4053  
FAX 219.879.9313

sales@msfooster.com  
www.msfooster.com