


WHAT YOU GET

- 1. Main Housing-** 1/4" aluminum thick housing, hard coat anodized, IP68 rated, hermetically sealed and dry nitrogen charged. Also features, a built-in front cover heating element and pneumatic air blast module which automatically removes snow and ice buildup from the exit window every 5 seconds.
- 2. In Cab Control Panel-** Allows the operator to turn the laser On/Off, as well as the front lens deicer and automatic air blast functions. Additionally, it offers a single plow position sensor wire providing the operator with a visual heads up.

(Wing Down=Laser ON / Wing Up=Laser OFF)
- 3. 15 FT. 12vdc Cable-** Runs from in cab control panel to vehicles 12vdc power source.
- 4. 25 FT. Interconnect Cable-** Waterproof mil-spec in-line connector mounted between the laser and the in-cab control panel.
- 5. 20 FT. DOT Approved 3/4" Pneumatic Hose Line-** Complete with in-line 5-micron Parker filter kit, plus connectors for tying into your vehicles secondary air source.
- 6. Owner's Manual (Not Shown)**

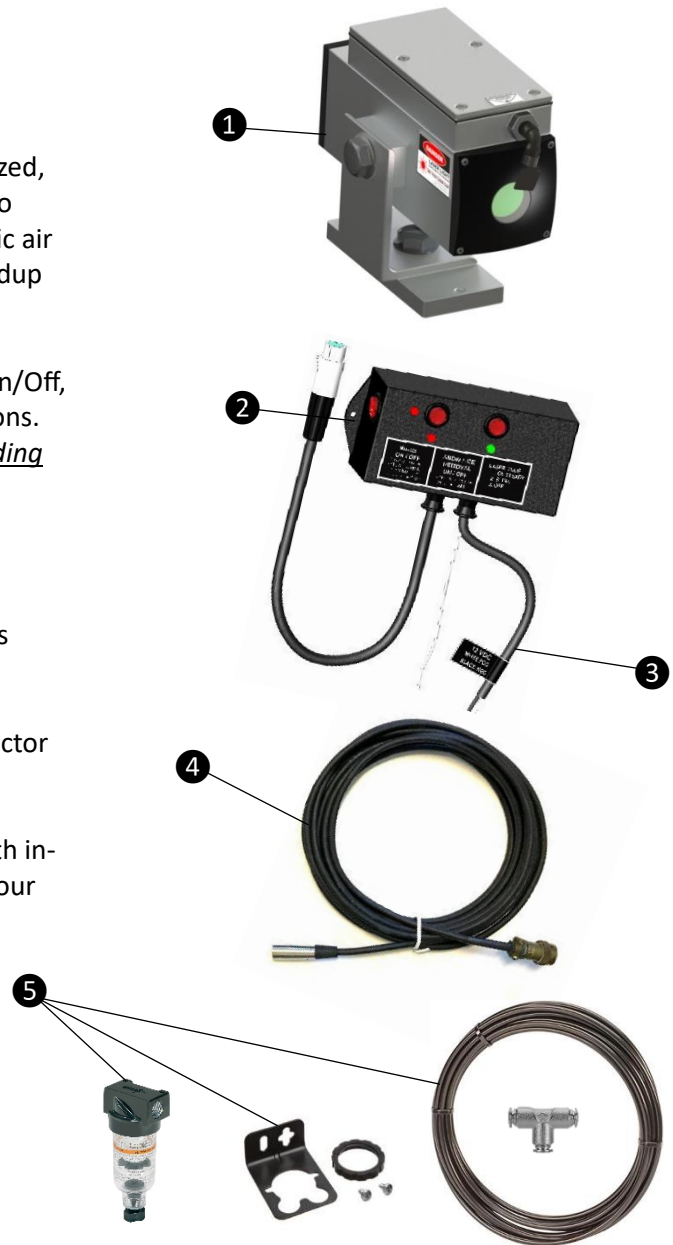

SPECIFICATIONS:

Laser: 532 NM Class IIIa Green Laser
Power: 12 Volts DC
Power Draw: 4.0 Amps Max Operation
 (0.03 Amps Standby Mode)
Operating Temperature: -40° F to +122° F
 (-40° C to +50° C)

Pneumatic: 120 PSI / 12V DC Operation
Laser Dimensions:
Height: 6-3/8 Inches
Length: 7-7/8 Inches
Width: 4-1/4 Inches (At widest Point)
Interconnect Cable: 25 Feet (Laser to Control Panel)

12 VDC Power Cable Length: 15 Feet
Pneumatic Hose Line Length: 20 Feet
 (Laser to Air Source)

Shipping Weight: 25 lbs.
Warranty: 12 Months

HEAVY DUTY GUIDANCE LASERS - "IT'S WHAT WE DO"- SINCE 1988



MS FOSTER

SERVING THE TRANSPORTATION INDUSTRY

1040 Highway 212
 Michigan City, IN 46360

OFFICE 219.879.9225
 TOLL FREE 888.452.4053
 FAX 219.879.9313

sales@msfoster.com
 www.msfoster.com